



Samsung SGH-X105 Earpiece Speaker Replacement

Written By: Chris Lao



INTRODUCTION

Replacing the earpiece speaker

TOOLS:


- [1.5 mm Flathead Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Battery



- Rotate the phone onto its front side so that the LCD screen is facing away from you.

Step 2

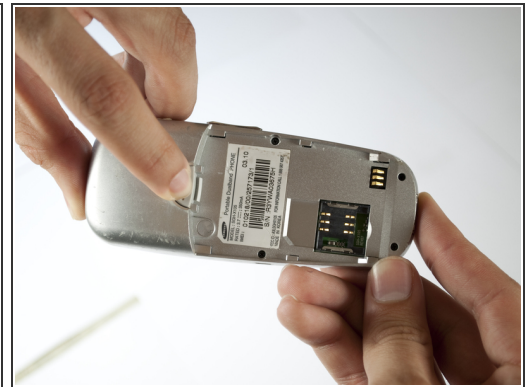

- Remove the battery by pressing down on the battery release button while sliding the battery downwards.

Step 3 — Front & Back Panels



- Remove the four small black screws that secure the back phone panel using the Phillips #00 screwdriver.
- ⓘ Complete removal of screws may not be necessary.

Step 4



- Carefully separate the front and back panels by gently prying them apart. Start at the bottom of the phone (near the AC charger input).
- ⓘ Volume control button will be unsecured and may fall out as soon as the panels are separated.
- ⓘ Gentle force may be required to separate the panels at the top latch.
- ⓘ There are two wires connecting the front and back panels. Be careful not to rip these wires out when separating the panels.

Step 5



- Using your nails, tweezers, or any precise grabbing tool, pinch the antenna wire connector (clear plastic plug) and pull gently. It should pop out rather easily.

Step 6 — Earpiece Speaker



- Put aside the back panel. You will only be working with the front panel from here on.

Step 7



- Using a SL 1.5 flathead screwdriver (or any small prying tool), pry the speaker from the plastic front cover.
- ⓘ The earpiece speaker is magnetic so you can use a magnet to remove the earpiece speaker from the plastic front cover once loosened.
- ★ You can apply your own adhesive to secure your replaced speaker if desired during reassembly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-20 11:52:17 AM.